



ROLL CAGE REQUIREMENTS




ROLL CAGE MUST HAVE
2 PROTECTION BARS IN
ROOF. (DOTTED LINES
SHOW SUGGESTED
POSITION ONLY.)

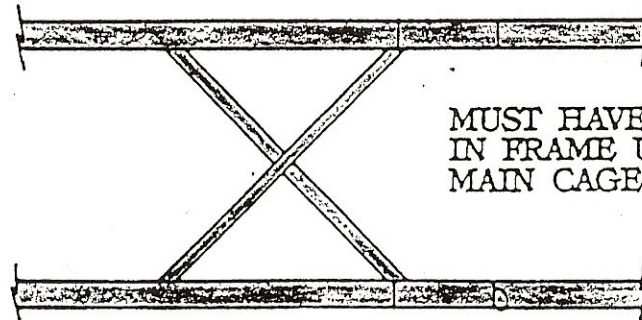


MUST HAVE X
IN FRAME UNDER
MAIN CAGE.

REAR

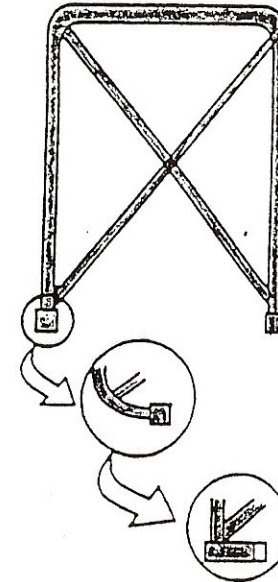


OPTIONAL METHOD
FOR MOUNTING
CAGE ON LEFT
SIDE ONLY.

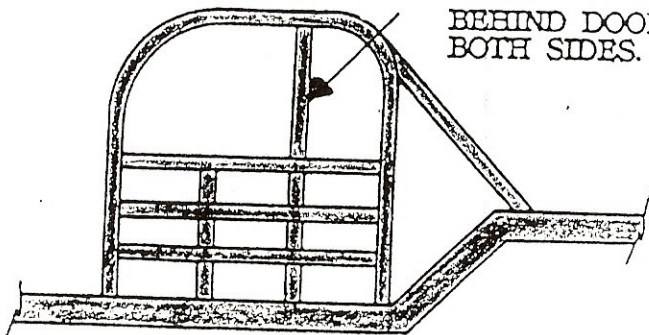

BEHIND DOOR POST
BOTH SIDES.

ALL 90° JOINTS IN ROLL CAGE MUST BE GUSSETED.

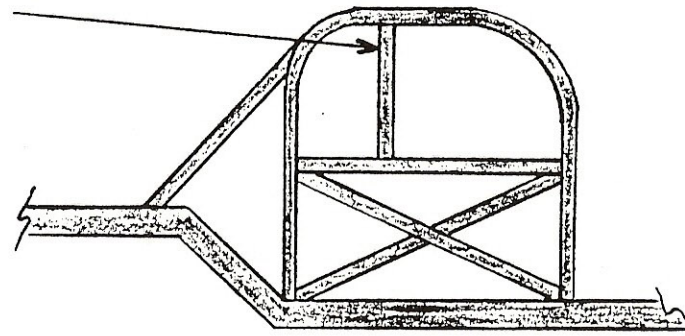

OPTIONAL RIGHT SIDE DOOR BARS